



POWERFUL AIR CIRCULATION

Designed to move impressive amounts of air, equalizing temperature and humidity, reducing the load on heating and cooling equipment, and improving the comfort and productivity of occupants at a fraction of the cost and complexity of HVLS fans.



WHISPER-QUIET OPERATION

Engineered for whisper-quiet operation so you don't have to sacrifice communication for cooling. Sound levels are part of comfort and safety too. Kevlar belt-driven technology gives AMS fans amazing power and air movement, with ultra-low noise.

DISTRIBUTED BY



cleanburn.com



FLEXIBLE, CONVENIENT PORTABILITY

Simple, lightweight design and industrial-grade castor wheels you can put the breeze right where you need it, every time.


SPECIFICATIONS

DIAMETER	59 inches (1.5 m)
WEIGHT	134 lbs. (60.8 kg)
ELECTRICAL	115-1P VAC (optional 230-1P VAC)
OUTPUT	43,000 CFM (1,360 m3/min)
MOTOR	1.5 HP, Inverter motor, Class F Insulation, TEFC Industry Duty, IP-55, UL
CONTROLS	Variable Speed VFD, IP-66 Enclosure
NOISE LEVEL	43.4 DB (20' from fan on axis)

▲ Black finish available for an additional charge.



SOUND LEVEL & DIMENSIONS

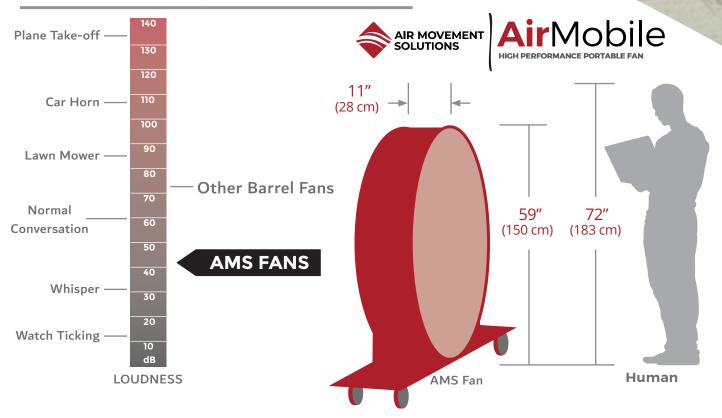

COVERAGE AREA

6-AIRFOIL DESIGN (STANDARD)

Long, wide [75' (23 m)] conical area of effect

70'
(21 m)

100'
(30 m)

3 - AIRFOIL DESIGN (OPTIONAL)

Ultra-long, narrow [30′ (9 m)] conical area of effect